



Water Feature Pump

Submersible




50PNI2.4S
50PNI2.75S

Energy-Saving Type

Food Grade Lubricant used is
Fish Friendly




Applications

-  Circulating water in waterscape garden. (e.g. fish pond, artificial waterfall, fountain, etc.)
-  Draining wastewater from residence, hotel, restaurant, etc.
-  Pumping rainwater and springwater from basement.


Amenics
Amenities from Technology
for People and the Earth

Features

-  Anti-wicking Cable Entry
-  Motor Protector
-  Dual Inside Mechanical Seal
-  Oil Lifter (Patented)
-  Liquid Paraffin Oil
-  Air Release Valve
-  Back Pull-out Design
-  Removable Handle



Performance Curves

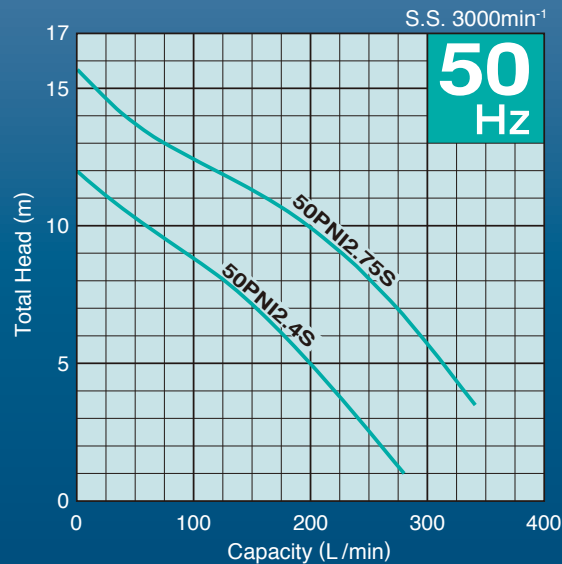

Standard Specifications

| | | |
|-------------|--|--|
| Pump | Discharge Bore | 50mm |
| | Discharge Connection | Screwed Flange |
| | Impeller | Vortex / Glass-fiber Reinforced Resin |
| | Casing | Glass-fiber Reinforced Resin |
| | Shaft Seal | Double Mechanical Seal (with Oil Lifter) / Silicon Carbide |
| | Lubricant | Liquid Paraffin (ISO VG32) |
| Motor | Output | 0.4 • 0.75kW |
| | Phase | Single |
| | Type | Dry-type Submersible Induction Motor 2-pole / 50Hz |
| | Protection Device (Built-in) | Miniature Thermal Protector — 0.4kW Circle Thermal Protector — 0.75kW |
| Measurement | Cable | 5m / PVC |
| | Dimensions L x W x H Dry Weight (excluding Cable) | 241 x 162 x 360 • 241 x 162 x 380mm 7.2 • 9.3kg |

* We reserve the right to change the specifications and designs for improvement without prior notice.